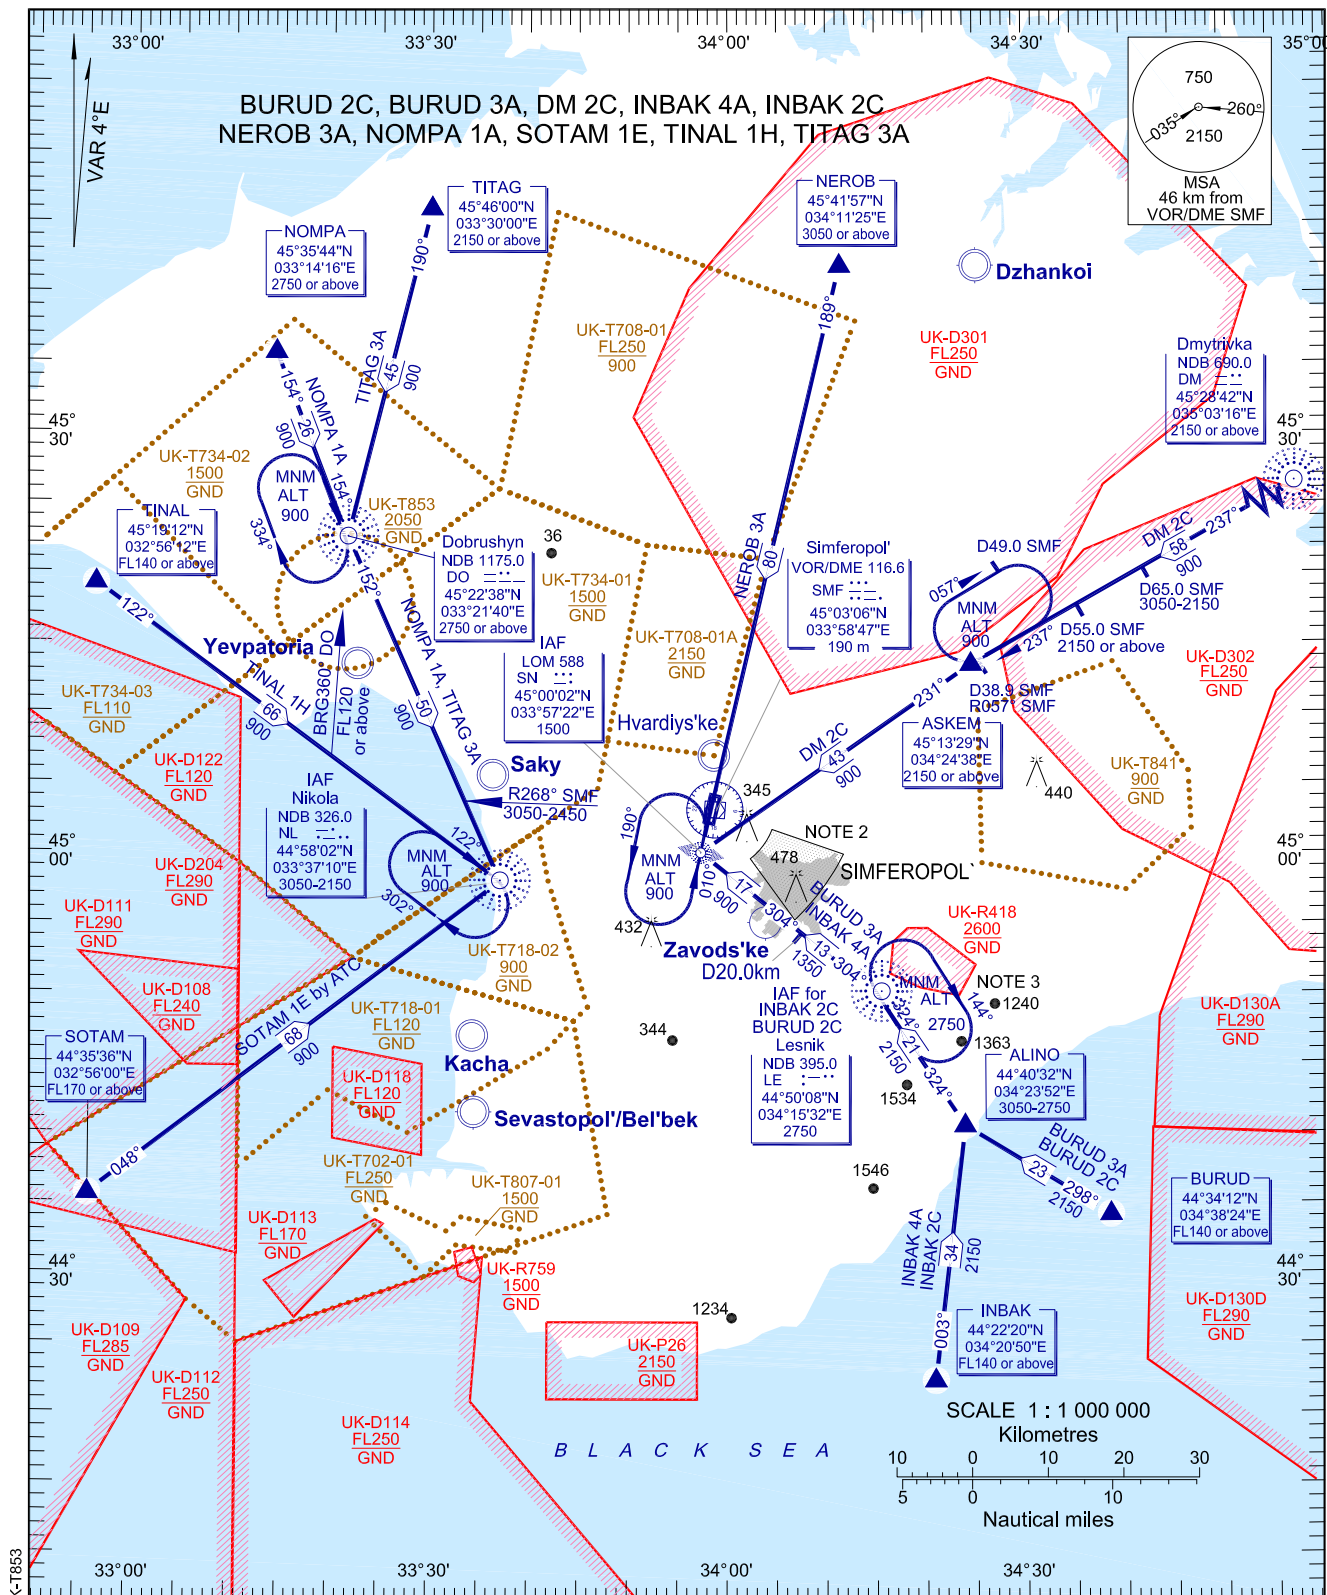


STANDARD ARRIVAL CHART
INSTRUMENT (STAR)-ICAO

TRANSITION LEVEL	by ATC	Radar 124.700,135.775
TRANSITION ALT	3050	ATIS 127.200

17 NOV 2011
SIMFEROPOL
RWY 01

NOTE:

1. Do not descent below vertical limits of PRD zones until appropriate ATC instruction will be given.
2. See NOTE concerning visual approach restriction as shown on IAC
3. MNM ALT 3050 HLDG LE during operating hours UK-R418


BEARINGS AND TRACKS ARE MAGNETIC
ALTITUDES, HEIGHTS AND ELEVATIONS ARE IN METRES
DISTANCES ARE IN KILOMETRES

STAR RWY 01

Designator	Route	Altitude	Remarks
BURUD 2C BURUD TWO CHARLIE	On track 298° to ALINO , turn RIGHT on track 324° to IAF LE NDB.	Cross BURUD at FL140 or above, ALINO at 2750 - 3050, IAF LE NDB at 2750.	nil
BURUD 3A BURUD THREE ALFA	On track 298° to ALINO , turn RIGHT on track 324° to LE NDB, turn LEFT on track 304° to IAF SN LOM.	Cross BURUD at FL140 or above, ALINO at 2750 - 3050, LE NDB at 2750, IAF SN LOM at 1500.	nil
DM 2C Dmytrivka TWO CHARLIE	On track 237° (R057° SMF VOR) to ASKEM, turn LEFT on track 231° to IAF SN LOM	Cross DM NDB, D55.0 SMF DME, ASKEM at 2150 or above, D65.0 SMF DME at 3050-2150, IAF SN LOM at 1500.	nil
INBAK 4A INBAK FOUR ALFA	On track 003° to ALINO , turn LEFT on track 324° to LE NDB, turn LEFT on track 304° to IAF SN LOM.	Cross INBAK at FL140 or above, ALINO at 2750 - 3050, LE NDB at 2750, IAF SN LOM at 1500.	nil
INBAK 2C INBAK TWO CHARLIE	On track 003° to ALINO , turn LEFT on track 324° to IAF LE NDB.	Cross INBAK at FL140 or above, ALINO at 2750 - 3050, IAF LE NDB at 2750.	nil
NEROB 3A NEROB THREE ALFA	On track 189° to IAF SN LOM.	Cross NEROB at 3050 or above, IAF SN LOM at 1500.	nil
NOMPA 1A NOMPA ONE ALFA	On track 154° to DO NDB, turn LEFT on track 152° to IAF NL NDB.	Cross NOMPA, DO NDB at 2750 or above, R268° SMF VOR at 2450 - 3050, IAF NL NDB at 2150 - 3050.	nil
SOTAM 1E SOTAM ONE ECHO	On track 048° to IAF NL NDB.	Cross SOTAM at FL170 or above, IAF NL NDB at 2150 - 3050.	By ATC clearance.
TINAL 1H TINAL ONE HOTEL	On track 122° to IAF NL NDB.	Cross TINAL at FL140 or above, BRG360° DO DNB at FL120 or above, IAF NL NDB at 2150 - 3050.	nil
TITAG 3A TITAG THREE ALFA	On track 190° to DO NDB, turn LEFT on track 152° to IAF NL NDB.	Cross TITAG at 2150 or above, DO NDB at 2750 or above, R268° SMF VOR at 2450 - 3050, IAF NL NDB at 2150 - 3050.	nil

TRANSITION LEVEL	by ATC	Radar 124.700,135.775
TRANSITION ALT	3050	ATIS 127.200

17 NOV 2011
SIMFEROPOL`
RWY 19

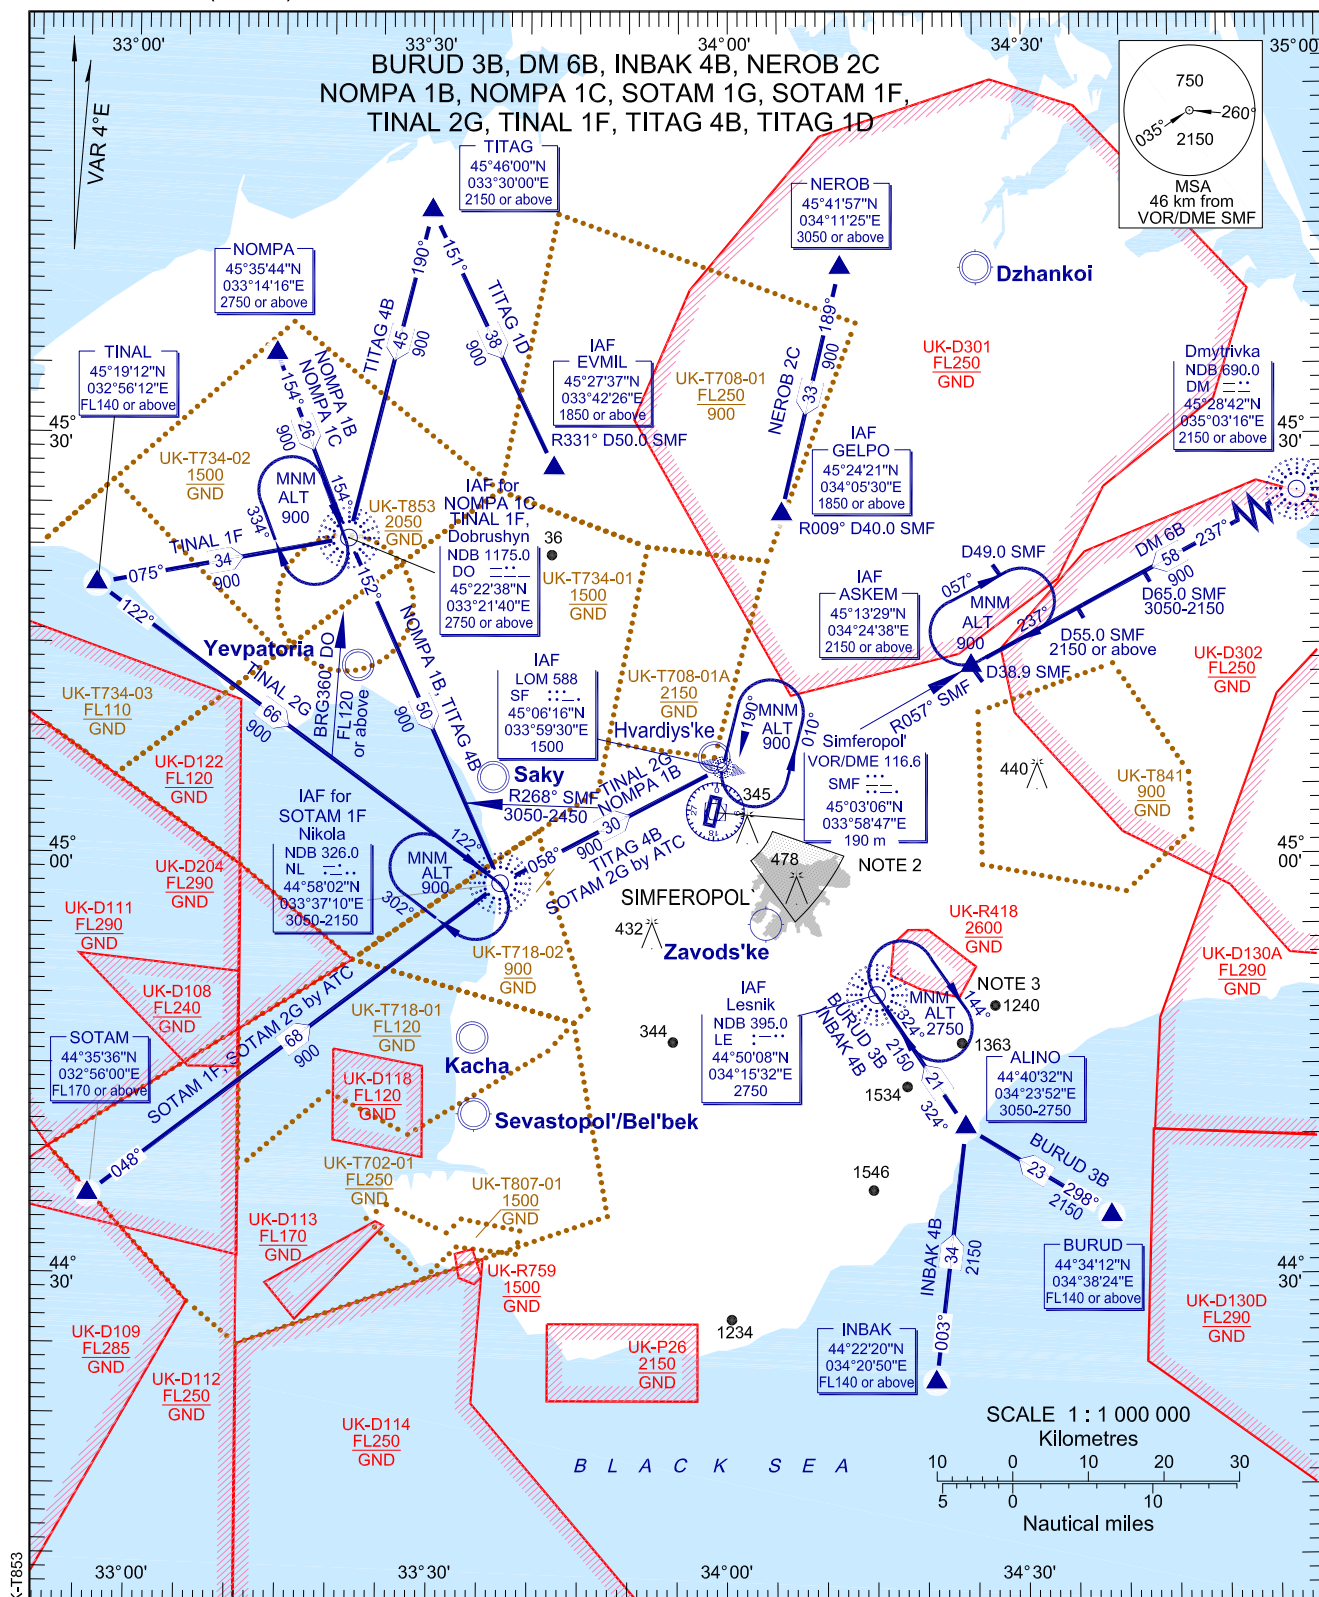

1. Do not descent below vertical limits of PRD zones until appropriate ATC instruction will be given.
2. See NOTE concerning visual approach restriction as shown on IAC
3. MNM ALT 3050 HLDG LE during operating hours UK-R418

BEARINGS AND TRACKS ARE MAGNETIC
ALTITUDES, HEIGHTS AND ELEVATIONS ARE IN METRES
DISTANCES ARE IN KILOMETRES

CHANGE: SID routes: new WPT NOPA: UK-T853

STAR RWY 19

Designator	Route	Altitude	Remarks
BURUD 3B BURUD THREE BRAVO	On track 298° to ALINO , turn RIGHT on track 324° to IAF LE NDB.	Cross BURUD at FL140 or above, ALINO at 3050 - 2750, IAF LE NDB at 2750.	nil
DM 6B Dmytrivka SIX BRAVO	On track 237° to IAF ASKEM.	Cross DM NDB, D55.0 SMF DME, IAF ASKEM at 2150 or above, D65.0 SMF DME at 3050-2150.	nil
INBAK 4B INBAK FOUR BRAVO	On track 003° to ALINO , turn LEFT on track 324° to IAF LE NDB.	Cross INBAK at FL140 or above, ALINO at 3050 - 2750, IAF LE NDB at 2750.	nil
NEROB 2C NEROB TWO CHARLIE	On track 189° to IAF GELPO.	Cross NEROB at 3050 or above, IAF GELPO at 1850 or above.	nil
NOMPA 1C NOMPA ONE CHARLIE	On track 154° to IAF DO NDB.	Cross NOMPA, IAF DO NDB at 2750 or above.	nil
NOMPA 1B NOMPA ONE BRAVO	On track 154° to DO NDB, turn LEFT on track 152° to NL NDB, turn LEFT on track 058° to IAF SF LOM.	Cross NOMPA, DO NDB at 2750 or above, R268° SMF VOR at 3050-2450, NL NDB at 3050-2150, IAF SF LOM at 1500.	nil
SOTAM 2G SOTAM TWO GOLF	On track 048° to NL NDB, turn RIGHT on track 058° to IAF SF LOM.	Cross SOTAM at FL170 or above, NL NDB at 3050 - 2150, IAF SF LOM at 1500.	By ATC clearance.
SOTAM 1F SOTAM ONE FOXTROT	On track 048° to IAF NL NDB.	Cross SOTAM at FL170 or above, IAF NL NDB at 3050 - 2150.	By ATC clearance.
TINAL 2G TINAL TWO GOLF	On track 122° to NL NDB, turn LEFT on track 058° to IAF SF LOM.	Cross TINAL at FL140 or above, BRG360° DO NDB at FL120 or above, NL NDB at 3050 - 2150, IAF SF LOM at 1500.	nil
TINAL 1F TINAL ONE FOXTROT	On track 075° to IAF DO NDB.	Cross TINAL at FL140 or above, IAF DO NDB at 2750 or above.	nil
TITAG 4B TITAG FOUR BRAVO	On track 190° to DO NDB, turn LEFT on track 152° to NL NDB, turn LEFT on track 058° to IAF SF LOM.	Cross TITAG at 2150 or above, DO NDB at 2750 or above, R268° SMF VOR at 3050 - 2450, NL NDB at 3050 - 2150, IAF SF LOM at 1500.	nil
TITAG 1D TITAG ONE DELTA	On track 151° to IAF EVMIL.	Cross TITAG at 2150 or above, IAF EVMIL at 1850 or above.	nil